



布水器系列

Water Distributor Series

◎ 普通组件式布水器

Normal assembled water distributor

◎ 大通量 高流速 高强度 绕丝管布水器

High-flow pvc sonic-welded screen water distributor



АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru





阿图祖上下集散

Autotrol top and bottom distributor

H2801-B (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

H2803 (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

富来克上下集散

Fleck top and bottom distributor

H2805 (3/4")



材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm

H2807 (3/4")



材质 (Material): ABS/PVC
缝隙 (Slots): 0.25mm

普通上下集散

1" top and bottom distributor

H2805-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
1": (32mm/ 33.4mm)

H2807-1(1")



材质 (Material): ABS
缝隙 (Slots): 0.25mm
中心管 (Tube)
1": (32mm/33.4mm)

香菇头及加长香菇头系列

Distributor for 6"-12" Vessels

H2809 (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

H2810 (3/4")



材质 (Material): ABS
缝隙 (Slots): 0.25mm

H2809L(3/4" ,1")



材质 (Material): UPVC
缝隙 (Slots): 0.25mm
中心管 (Tube)
3/4": (26.7mm)

H2810L(3/4" ,1")



材质 (Material): UPVC
缝隙 (Slots): 0.25mm
中心管 (Tube)
3/4": (26.7mm)





汉堡头系列

Top Distributor for 12"-36" Vessels

普通上布水器 中心管 1 1/4" / 1.5" (42/48.5/50mm)

1 1/4" / 1.5" top distributor

H182A

配Fleck阀 suit for Fleck valve



H182B

配润新阀 suit for Runxin valve



H182-1

配阿图祖麦能阀 suit for Autotrol Nylon valve



富来克3150上布水器 中心管2"(60/63mm)


top screen for fleck 3150 valve

H182AL-1(2")

H182AL-2(2")



有不锈钢螺钉 with stainless screw

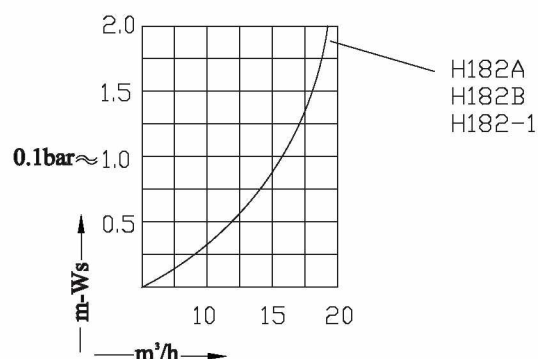


润新阀用上布水器 中心管1.5"(48.5/50mm)

top screen for Runxin valve

H182BL-1(1.5")

H182BL-2(1.5")

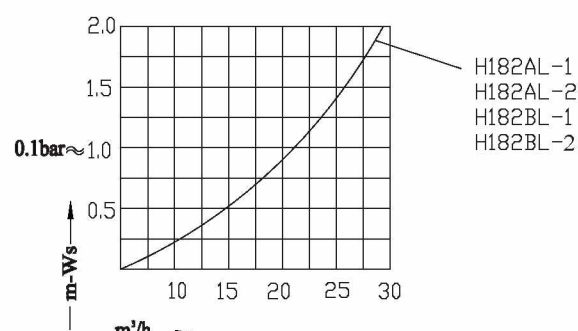

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru







Type: H2804



材质 (Material): PP
缝隙 (Slots): 0.2mm
插管口 (ϕA):
H2804: 50mm/48.5mm

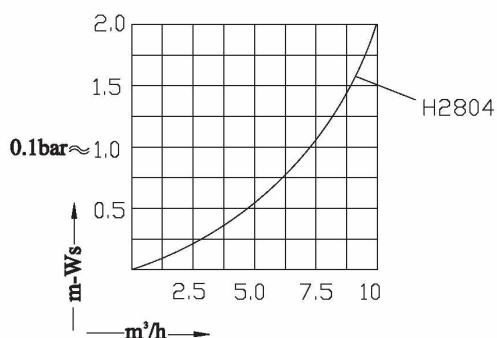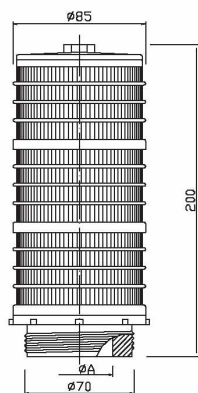

Type: H2808




材质 (Material): ABS
缝隙 (Slots): 0.25mm / 0.5mm
插管口 (ϕA):
H2808/H2808L1/H2808L2:
50mm/48.5mm/42mm


Type: H2808L1



Type: H2808L2




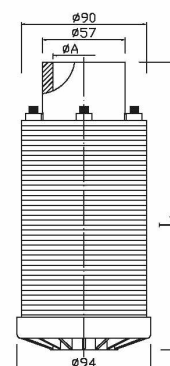


L(H2808)=200
L(H2808L1)=260
L(H2808L2)=440

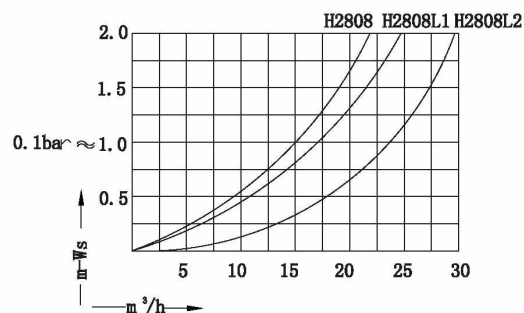



六爪顶装下布水器-A系列 Top mount distributor 6 laterals-A series

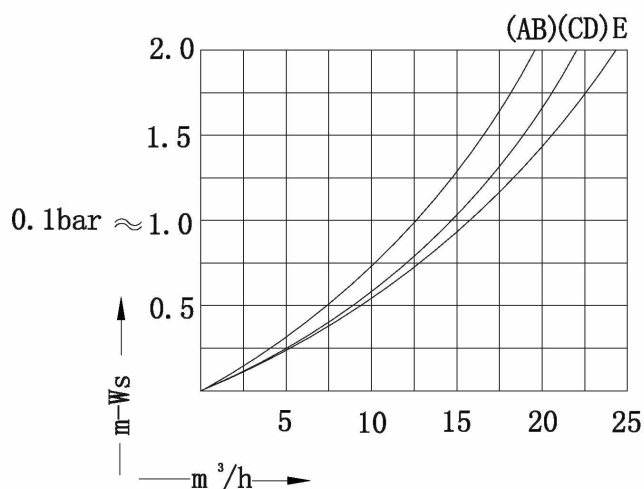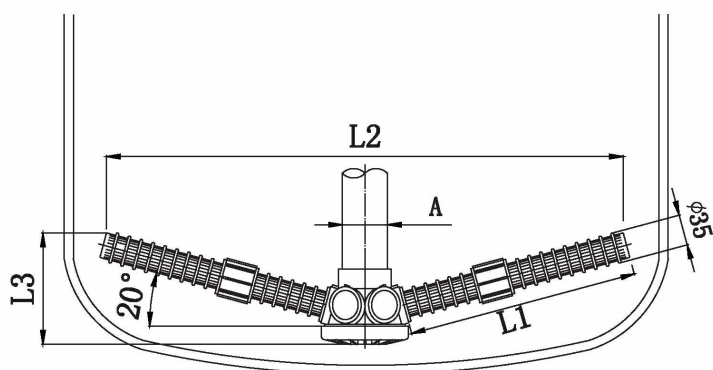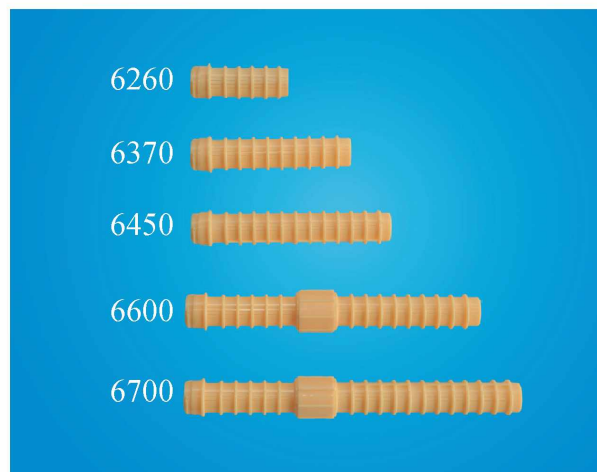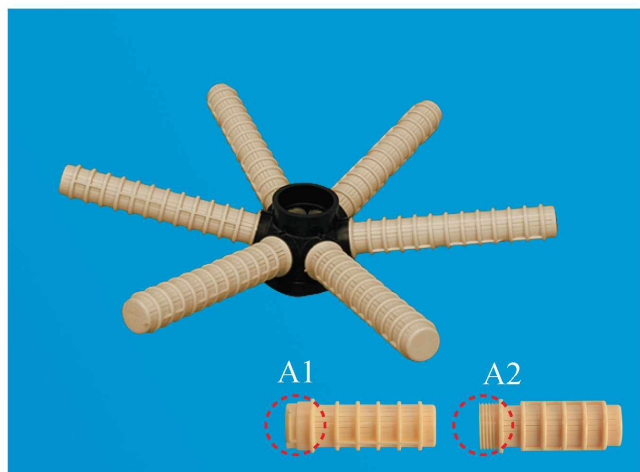

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
		A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6260A1	HU6260A2	42/48.5/50	82	145	71	12"-16" (300-400mm)	A	4"-8UN
HU6370A1	HU6370A2		142	365	83	18"-21" (450-550mm)	B	
HU6450A1	HU6450A2		182	440	95	24" (600mm)	C	
HU6600A1	HU6600A2		266	610	105	30" (750mm)	D	
HU6700A1	HU6700A2		308	690	114	36"-42" (900-1000mm)	E	

Note:

A1系列支管采用卡口式, A2系列支管采用螺纹式。

The laterals of A1 series adopt quick lock, and A2 series adopt thread.






六爪顶装下布水器-B系列

Top Mount Distributor 6 Laterals -B series


B1 series (quick lock)




B2 series (Thread)

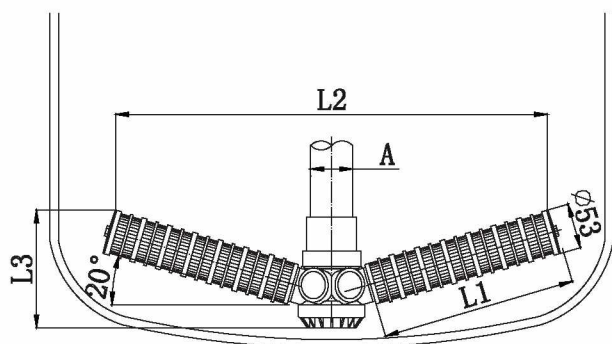

SLOT:0.2mm/0.25mm

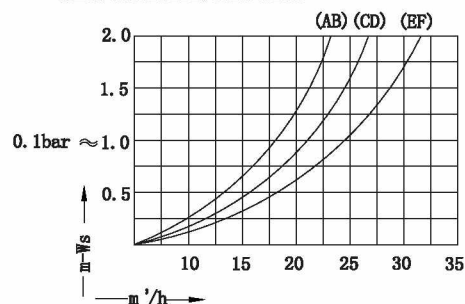

SLOT:0.4mm/0.5mm

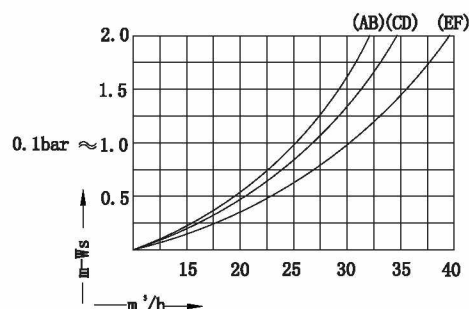

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
		A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6260B1	HU6260B2	1.5" (42/48.5/50)	111	296	110	12"-16" (300-400mm)	A	4"-8UN
HU6370B1	HU6370B2		174	416	125	18"-21" (450-550mm)	B	
HU6450B1	HU6450B2		205	455	135	24" (600mm)	C	
HU6600B1	HU6600B2		268	575	165	30" (750mm)	D	
HU6700B1	HU6700B2	2" (60/63)	331	710	175	36" (900mm)	E	
HU6850B1	HU6850B2		394	835	185	40"-48" (1000-1200mm)	F	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals of B1 series adopt quick lock, and B2 series adopt thread.








12爪高流速顶装下布水器-B系列 High Flow Top Mount Distributor 12 Laterals -B series




B1:




B2:

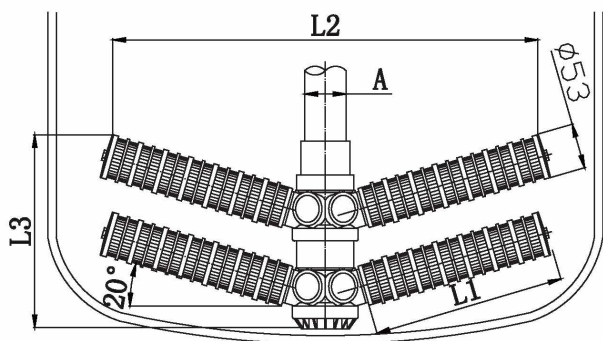

SLOT:0.2mm/0.25mm

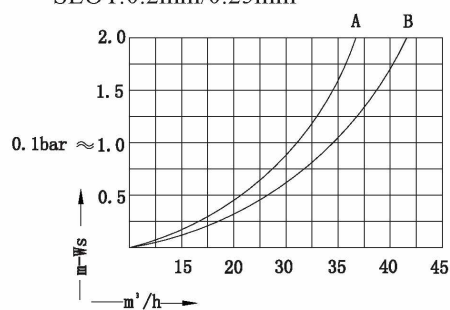

SLOT:0.4mm/0.5mm

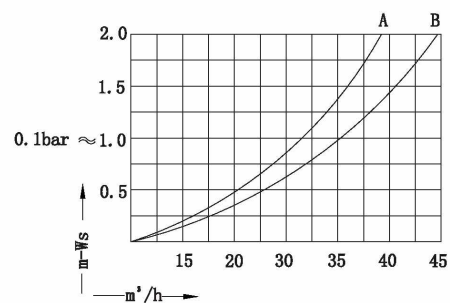

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Top Opening
HU6700B1-2 HU6700B2-2	60/63	331	710	300	36"-42" (900-1000mm)	A	4"-8UN
HU6850B1-2 HU6850B2-2		394	835	310	48"-63" (1200-1600mm)	B	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals of B1 series adopt quick lock, and B2 series adopt thread.

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru





侧装上布水器

Side Mount Diffuser for Top



H5671BE
(ELBOW CONNECT)





H5671BS
(STRAIGHT CONNECT)



H5671BU
(UNION CONNECT)



4"罐体接口紧固工具
Tighten tool for 4" FRP opening

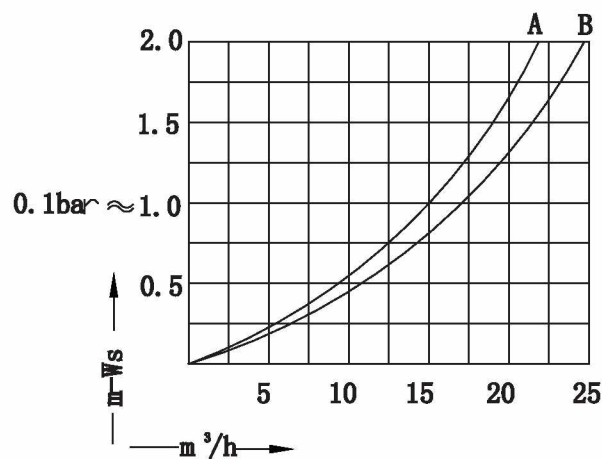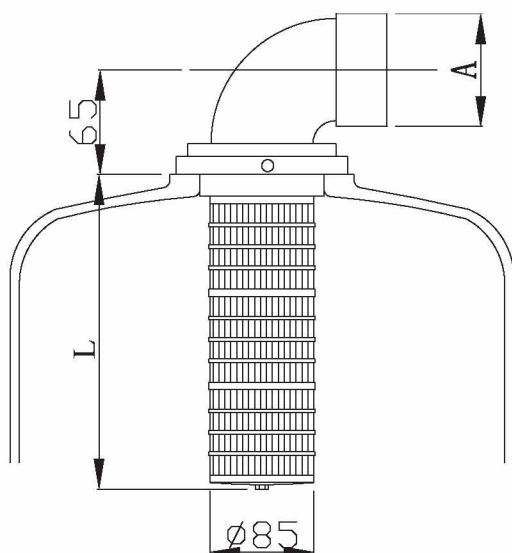

型号 Type	外管连接方式	尺寸 (mm)		罐体尺寸 Tank Size	流量	罐体上开口
	Connect method	A	L	Inches (mm)	Flow	Top Opening
H5671A/H5671B	E: Elbow S: Straight U: Union	60/63	210	12"-36" (300-900mm)	A	4"-8UN
H5671AL/H5671BL			316	36"-48" (900-1200mm)	B	

A系与B系所采用的4"罐口连接件不同
The 4" adaptor is difference between A series and B series

A:



B:



АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru





六爪侧装下布水器-A系列 Side Mount Distributor 6 Laterals -A Series





(ELBOW CONNECT)



(STRAIGHT CONNECT)



(UNION CONNECT)

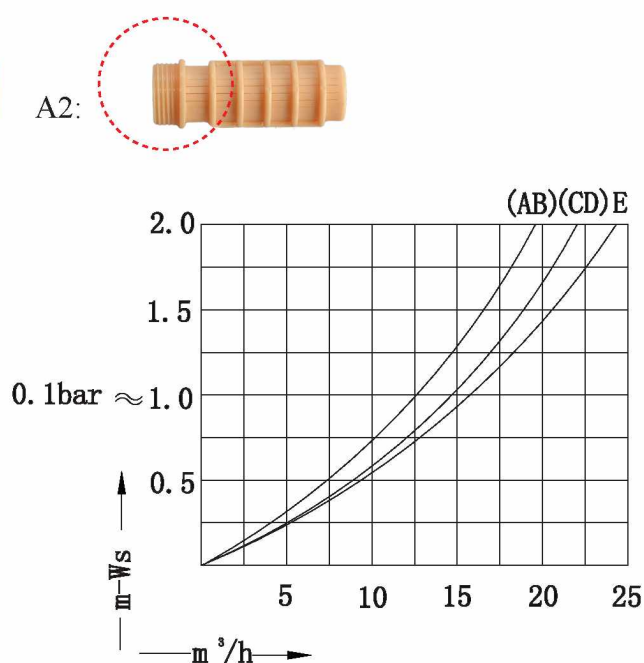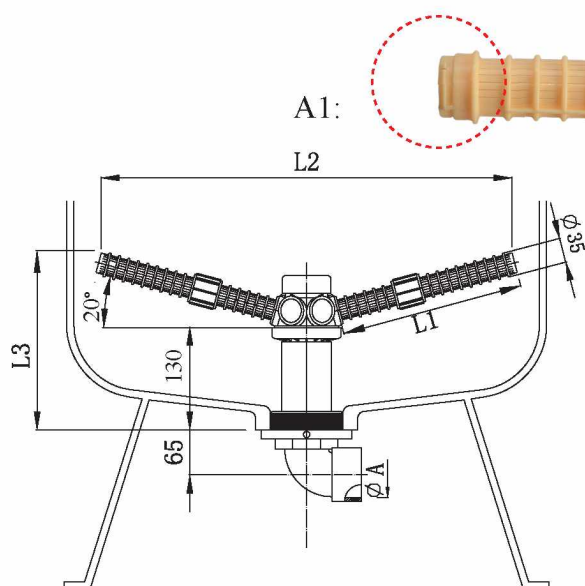

型号 Type		尺寸Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260A1	HD6260A2	60/63	82	145	158	12-16" (300-400mm)	A	4"-8UN
HD6370A1	HD6370A2		142	365	172	18-21" (450-550mm)	B	
HD6450A1	HD6450A2		182	440	178	24" (600mm)	C	
HD6600A1	HD6600A2		266	610	198	30" (750mm)	D	
HD6700A1	HD6700A2		308	690	203	36-42" (900-1000mm)	E	

外管连接方式可选: 1、弯头 2、直接 3、活接由令 无特殊说明, 默认为弯头连接

Connect Method of Outer Pipe with water distributor: 1,E: Elbow Connect. 2. S: Straight Connect. 3.U: Union Connect.

No special description, would be elbow connect

Note:

A1系列支管采用卡口式, A2系列支管采用螺纹式。

The laterals of A1 series adopt quick lock, and A2 series adopt thread.

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru






(ELBOW CONNECT)



(STRAIGHT CONNECT)




(UNION CONNECT)

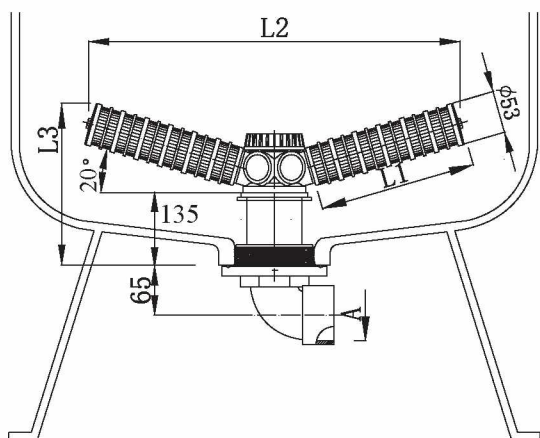


外管连接方式可选：1、弯头 2、直接 3、活接由令
无特殊说明，默认为弯头连接

Connect Method of Outer Pipe with water distributor:
1.E: Elbow Connect. 2. S: Straight Connect. 3.U: Union
Connect. No special description, would be elbow connect

SLOT(0.2/0.25mm)

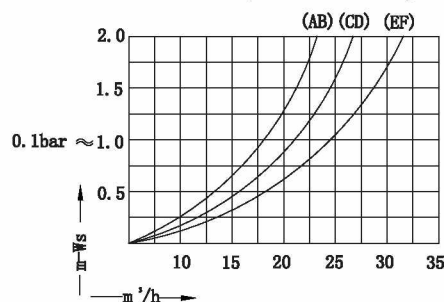

SLOT(0.4/0.5mm)

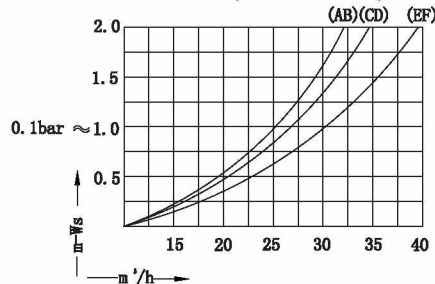

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6260B1	HD6260B2	60/63	111	296	156	12-16" (300-400mm)	A	4"-8UN
HD6370B1	HD6370B2		174	416	176	18-21" (450-550mm)	B	
HD6450B1	HD6450B2		205	455	186	24" (600mm)	C	
HD6600B1	HD6600B2		268	575	203	30" (750mm)	D	
HD6700B1	HD6700B2		331	710	223	36" (900mm)	E	
HD6850B1	HD6850B2		394	835	233	40"-48" (1000-1200mm)	F	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals of B1 series adopt quick lock, and B2 series adopt thread.






12爪高流速侧装下布水器-B系列 High Flow Side Mount Distributor 12 Laterals -B series




(ELBOW CONNECT)



(STRAIGHT CONNECT)

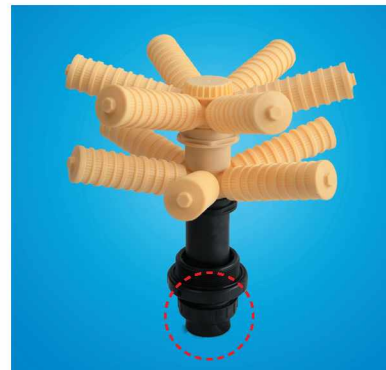


(UNION CONNECT)

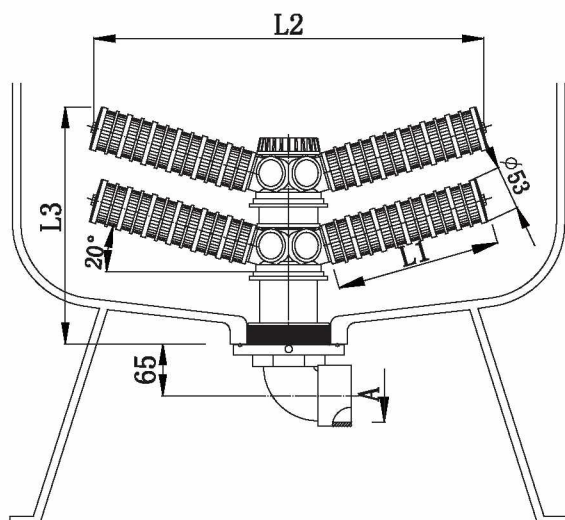


外管连接方式可选：1、弯头 2、直接 3、活接由令
无特殊说明，默认为弯头连接

Connect Method of Outer Pipe with water distributor:
1,E: Elbow Connect. 2. S: Straight Connect. 3.U: Union
Connect. No special description, would be elbow connect

SLOT(0.2/0.25mm)

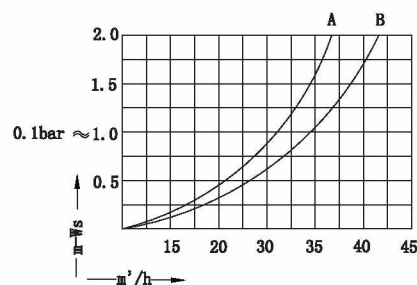

SLOT(0.4/0.5mm)

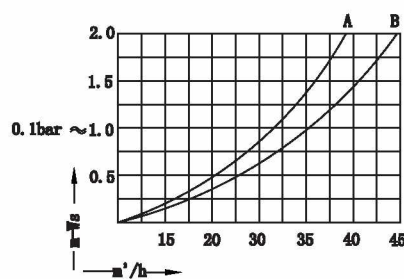

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD6700B1-2	HD6700B2-2	60/63	331	710	348	36"-40" (900-1000mm)	A	4"-8UN
HD6850B1-2	HD6850B2-2		394	835	358	48"-63" (1200-1600mm)	B	

Note:

B1系列支管采用卡口式，B2系列支管采用螺纹式。

The laterals of B1 series adopt quick lock, and B2 series adopt thread.

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих



+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru






八爪/十六爪顶装下布水器

Top Mount Distributor 8/16 Laterals

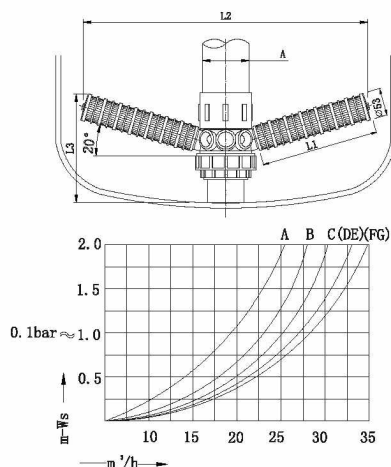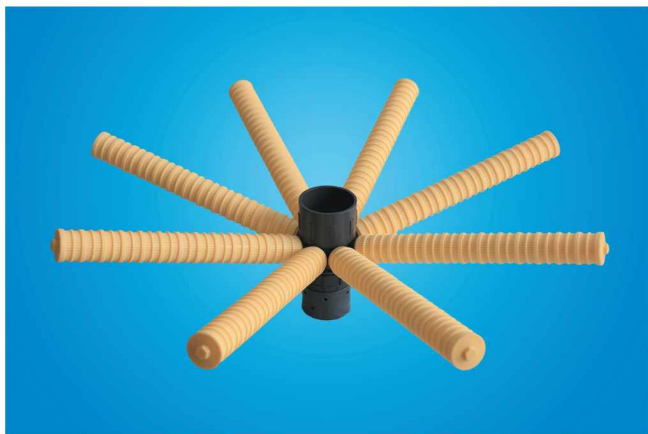

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3	Inches (mm)		
HU5669B1-1	HU5669B2- 1	89/90	205	490	205	24" (600mm)	A	6"FLG
HU5670B1-1	HU5670B2- 1		268	615	225	30" (750mm)	B	
HU5672B1-1	HU5672B2- 1		300	690	235	36" (900mm)	C	
HU5673B1-1	HU5673B2- 1		363	810	255	42" (1000mm)	D	
HU5674B1-1	HU5674B2- 1		426	930	275	48" (1200mm)	E	
HU5675B1-1	HU5675B2- 1		489	1050	295	60" (1500mm)	F	
HU5676B1-1	HU5676B2- 1		552	1170	305	63-80" (1600-2000mm)	G	

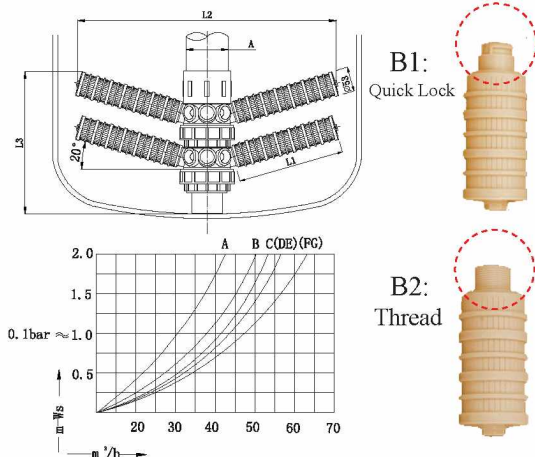



型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量 Flow	罐体上开口 Top Opening
		A	L1	L2	L3	Inches (mm)		
HU5669B1-2	HU5669B2- 2	89/90	205	490	342	24" (600mm)	A	6"FLG
HU5670B1-2	HU5670B2- 2		268	615	352	30" (750mm)	B	
HU5672B1-2	HU5672B2- 2		300	690	357	36" (900mm)	C	
HU5673B1-2	HU5673B2- 2		363	810	367	42" (1000mm)	D	
HU5674B1-2	HU5674B2- 2		426	930	377	48" (1200mm)	E	
HU5675B1-2	HU5675B2- 2		489	1050	387	60" (1500mm)	F	
HU5676B1-2	HU5676B2- 2		552	1170	407	63-80" (1600-2000mm)	G	






高通量八爪/十六爪顶装下布水器

High flow Top Mount Distributor 8/16 Laterals

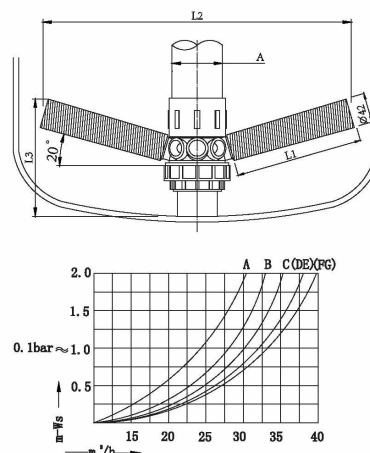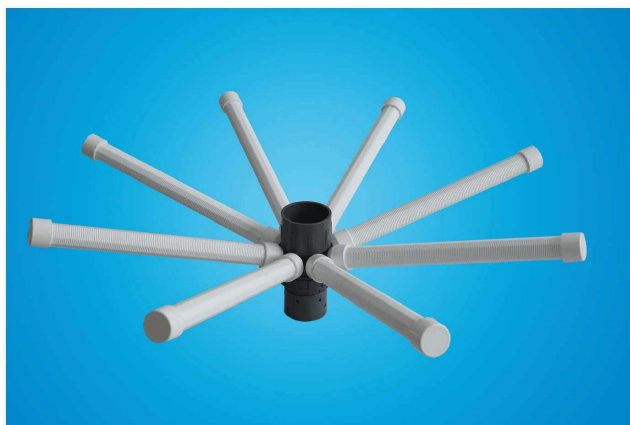

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-1	89/90	205	490	205	24" (600mm)	A	0.2/0.25/	6"FLG
HU5670C-1		268	615	225	30" (750mm)	B	0.3/0.35/	
HU5672C-1		300	690	235	36" (900mm)	C	0.4/0.45/	
HU5673C-1		363	810	255	42" (1000mm)	D	0.5/	
HU5674C-1		426	930	275	48" (1200mm)	E		
HU5675C-1		489	1050	295	60" (1500mm)	F	任意缝隙可选	
HU5676C-1		552	1170	305	63-80" (1600-2000mm)	G		

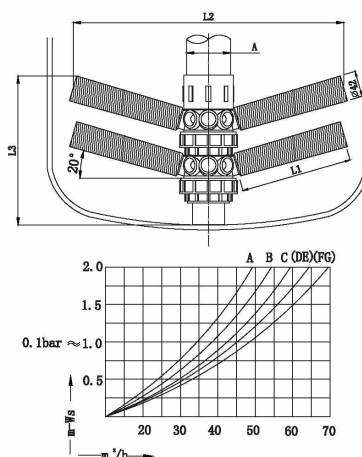



型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体上开口
	A	L1	L2	L3	Inches (mm)	Flow	Slot (mm)	Top Opening
HU5669C-2	89/90	205	490	342	24" (600mm)	A	0.2/0.25 /	6"FLG
HU5670C-2		268	615	352	30" (750mm)	B	0.3/0.35/	
HU5672C-2		300	690	357	36" (900mm)	C	0.4/0.45 /	
HU5673C-2		363	810	367	42" (1000mm)	D	0.5/	
HU5674C-2		426	930	377	48" (1200mm)	E		
HU5675C-2		489	1050	387	60" (1500mm)	F	任意缝隙可选	
HU5676C-2		552	1170	407	63-80" (1600-2000mm)	G		







6" 法兰口侧装布水器

Side Mount Top Distributor

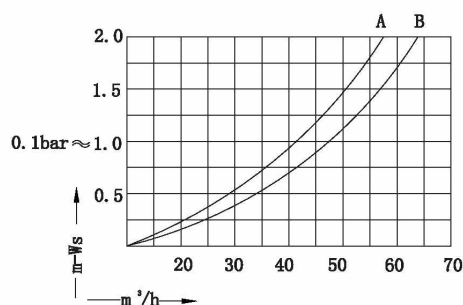

型号 Type	尺寸 Dimension (mm)			罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2				
H173	89/90/110 3"NPT/3"BSPP	415	215	24"-48"(600-1200mm)	A	0.2/0.5	6"FLG
H173L	4"NPT/4"BSPP 4"UN	640	440	48"-80"(1200-2000mm)	B		

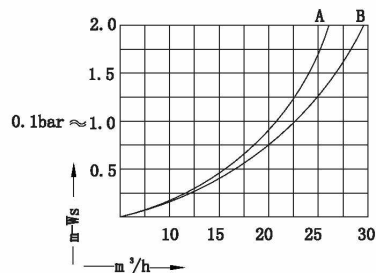



型号 Type	尺寸 Dimension (mm)			罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2				
H176	89/90/110 3"NPT/3"BSPP	325	180	24-48" (600-1200mm)	A	0.2	6"FLG
H176L-1	4"NPT/4"BSPP 4"UN	430	285	48-63" (1200-1600mm)	B		








6" 法兰口侧装布水器

Side Mount Top Distributor

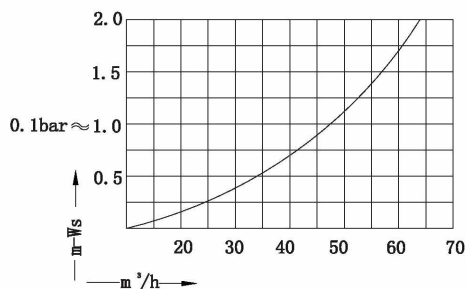

型号 Type	尺寸 Dimension (mm)			罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2				
HI76L-2	110 4"UN 4"NPT/4"BSPP	525	380	48"-80"(1200-2000mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/ 0.5/ 任意缝隙可选	6"FLG

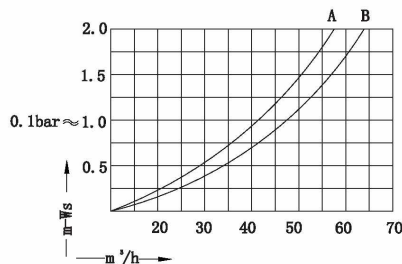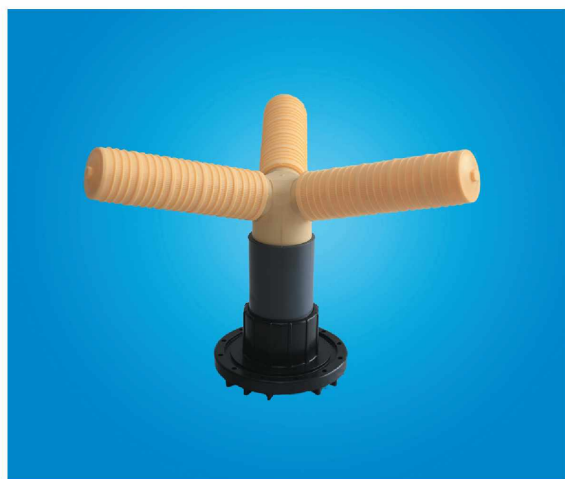

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	支管缝隙 Slot (mm)	罐体上开口 Top Opening
	A	L1	L2	L3				
HD5680	89/90/110 3"NPT/3"BSPP	180	550	295	36-48"(900-1200mm)	A	0.2	6"FLG
HD5680L	4"NPT/4"BSPP 4"UN	286	750	340	48-80"(1200-2000mm)	B		

备注：流量加大，法兰开口尺寸请选择4"

If Flow would be added, you'd better choose 4" opening FLANGE.

АВТ ОСМОС




Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru








八爪/十六爪侧装下布水器 Side Mount Distributor 8/16 Laterals

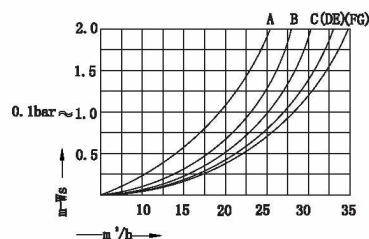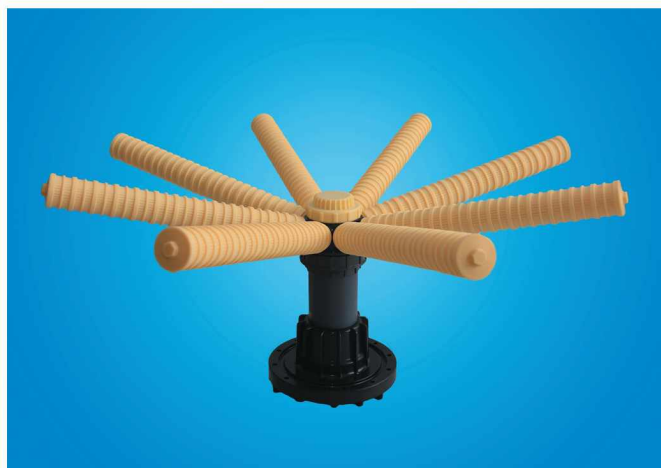

型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD5669B1-1	HD5669B2-1	89/90/110 3"NPT/3"BSPP 4"NPT/4"BSPP 4"UN	205	490	320	24" (600mm)	A	6"FLG
HD5670B1-1	HD5670B2-1		268	615	340	30" (750mm)	B	
HD5672B1-1	HD5672B2-1		300	690	355	36" (900mm)	C	
HD5673B1-1	HD5673B2-1		363	810	375	42" (1000mm)	D	
HD5674B1-1	HD5674B2-1		426	930	395	48" (1200mm)	E	
HD5675B1-1	HD5675B2-1		489	1050	415	60" (1500mm)	F	
HD5676B1-1	HD5676B2-1		552	1170	430	63"-80" (1600-2000mm)	G	

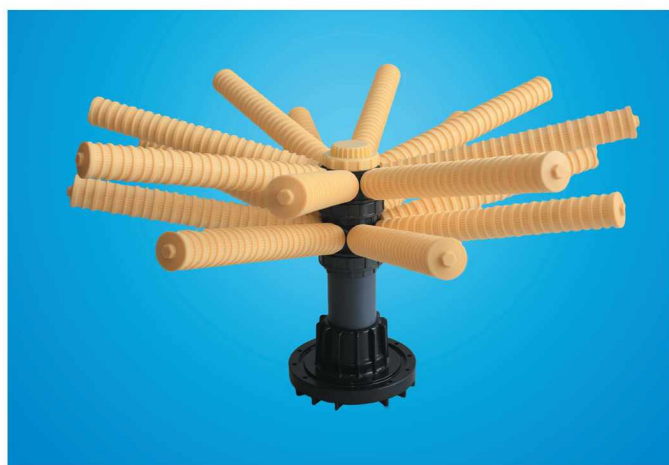

B1:
Quick Lock



B2:
Thread



型号 Type		尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	罐体下开口
		A	L1	L2	L3	Inches (mm)	Flow	Bottom Opening
HD5669B1-2	HD5669B2-2	89/90/110 3"NPT/3"BSPP 4"NPT/4"BSPP 4"UN	205	490	450	24" (600mm)	A	6"FLG
HD5670B1-2	HD5670B2-2		268	615	460	30" (750mm)	B	
HD5672B1-2	HD5672B2-2		300	690	465	36" (900mm)	C	
HD5673B1-2	HD5673B2-2		363	810	475	42" (1000mm)	D	
HD5674B1-2	HD5674B2-2		426	930	485	48" (1200mm)	E	
HD5675B1-2	HD5675B2-2		489	1050	495	60" (1500mm)	F	
HD5676B1-2	HD5676B2-2		552	1170	510	63"-80" (1600-2000mm)	G	

备注：流量为理论值，实际流量受多种因素影响。

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих



+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru







大流量八爪/十六爪侧装下布水器

High Flow Side Mount Distributor 8/16 Laterals

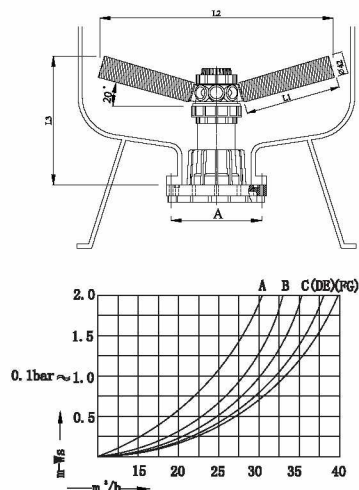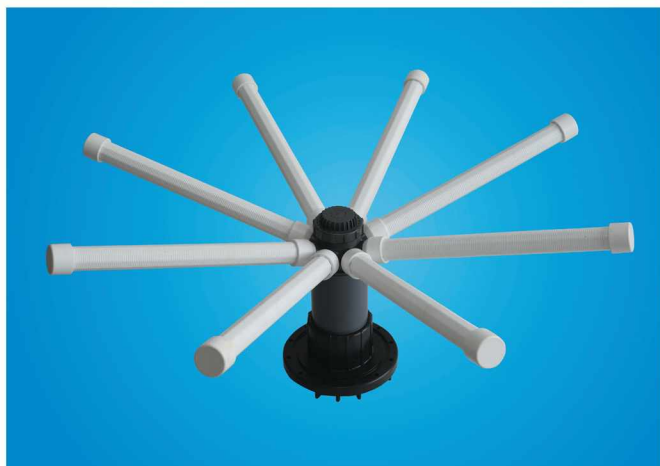

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)			
HD5669C-1	110 4"NPT/4"BSPP 4"UN	205	490	320	24" (600mm)	A	0.2/0.25/	6"FLG
HD5670C-1		268	615	340	30" (750mm)	B	0.3/0.35/	
HD5672C-1		300	690	355	36" (900mm)	C	0.4/0.45/	
HD5673C-1		363	810	375	42" (1000mm)	D	0.5/	
HD5674C-1		426	930	395	48" (1200mm)	E		
HD5675C-1		489	1050	415	60" (1500mm)	F	任意缝隙可选	
HD5676C-1		552	1170	430	63"-80" (1600-2000mm)	G		

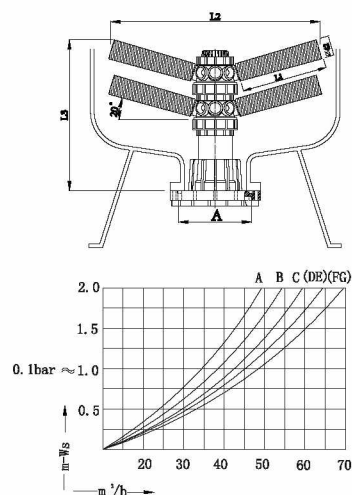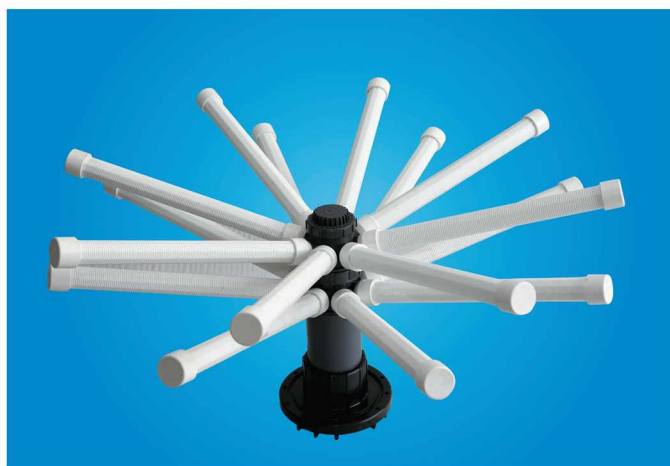



型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size	流量	绕丝管缝隙	罐体下开口
	A	L1	L2	L3	Inches (mm)			
HD5669C-2	110 4"NPT/4"BSPP 4"UN	205	490	450	24" (600mm)	A	0.2/0.25/	6"FLG
HD5670C-2		268	615	460	30" (750mm)	B	0.3/0.35/	
HD5672C-2		300	690	465	36" (900mm)	C	0.4/0.45/	
HD5673C-2		363	810	475	42" (1000mm)	D	0.5/	
HD5674C-2		426	930	485	48" (1200mm)	E		
HD5675C-2		489	1050	495	60" (1500mm)	F	任意缝隙可选	
HD5676C-2		552	1170	510	63"-80" (1600-2000mm)	G		







6" 法兰口侧装上、下布水器

Side Mount Top & Bottom Distributor

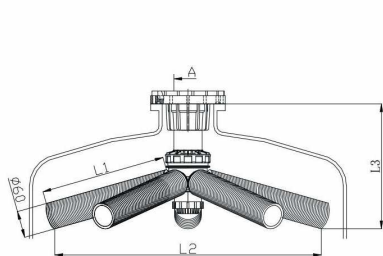

型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体上/下开口 Top/Bottom Opening
	A	L1	L2	L3				
HD5651-1	110 4"NPT/4"BSPP	552	1170	500	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/ 0.5/ 任意缝隙可选	6"FLG
HD5652-1	4"UN	615	1290	515	72"-80"(1800-2000mm)	B		

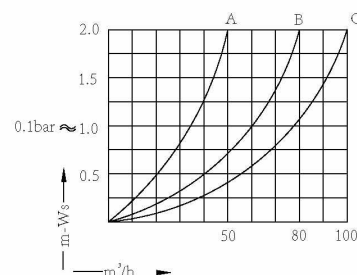



型号 Type	尺寸 Dimension (mm)				罐体尺寸 Tank Size Inches (mm)	流量 Flow	绕丝管缝隙 Slot (mm)	罐体下开口 Bottom Opening
	A	L1	L2	L3				
HD5651-2	110 4"NPT/4"BSPP	552	1170	650	60"-63"(1500-1600mm)	A	0.2/0.25/ 0.3/0.35/ 0.4/0.45/ 0.5/ 任意缝隙可选	6"FLG
HD5652-2	4"UN	615	1290	665	72"-80"(1800-2000mm)	B		



3900阀用6"法兰式上布水器









top distributor for Fleck 3900

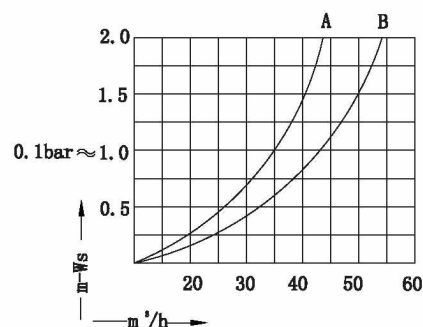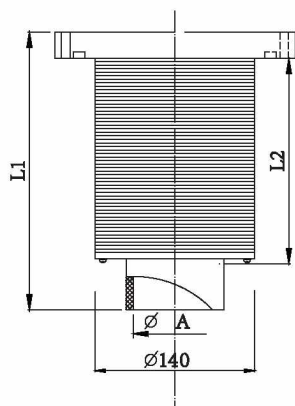

型号 (Type)	尺寸(Dimension) mm			流量 (Flow)	适用罐体 (Tank Size)	罐体开口 (Top Opening)
	A	L1	L2			
H171	90	290	220	A	36"-63"(900-1600mm)	6"FLG
H171L	90	510	440	B	63"-80"(1600-2000mm)	6"FLG

负压保护器

Vacuum breaker

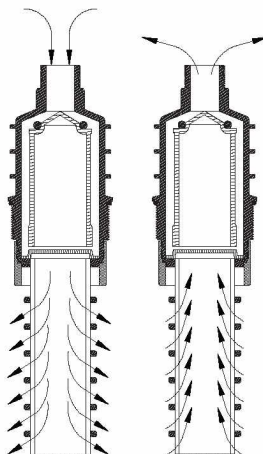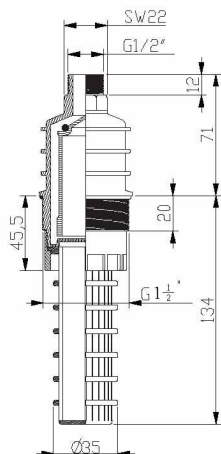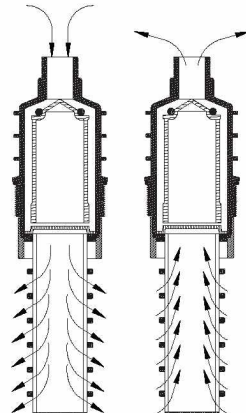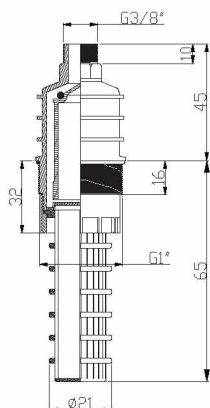

АВТ ОСМОС

Производство, поставка систем
очистки воды и комплектующих

+7 (958) 111-42-14
info@awt-osmos.ru
awt-osmos.ru

