

Walraven VibraTek® SB-MM Silentblock


(L2 05 60)

a rubber silentblock with two external threads



Features and benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- for use in compression only
- SB-MM with two external threads
- working temperature range -20 °C till 90 °C
- available in four configurations: (1) SB-MM with two external threads, (2) SB-MF with one external and one internal thread, (3) SB-FF with two internal threads, and (4) SB-M with one external thread and a rubber base

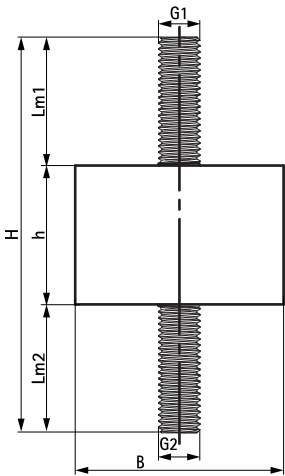

| Part No.   | B<br>(mm) | H<br>(mm) | h<br>(mm) | G1  | G2  | Lm1<br>(mm) | Lm2<br>(mm) | Max. Optimal Load<br>(N) | Max. Deflection<br>(mm) | Pack 1 |
|------------|-----------|-----------|-----------|-----|-----|-------------|-------------|--------------------------|-------------------------|--------|
| 2801400181 | 20        | 56        | 20        | M8  | M8  | 18          | 18          | 180                      | 2.0                     | 100    |
| 2801400291 | 25        | 56        | 20        | M8  | M8  | 18          | 18          | 290                      | 2.0                     | 100    |
| 2801400420 | 30        | 71        | 25        | M8  | M8  | 23          | 23          | 420                      | 2.5                     | 100    |
| 2801400750 | 40        | 86        | 40        | M8  | M8  | 23          | 23          | 750                      | 4.0                     | 100    |
| 2801401170 | 50        | 96        | 40        | M10 | M10 | 27          | 27          | 1,170                    | 4.0                     | 50     |
| 2801401690 | 60        | 114       | 40        | M12 | M12 | 37          | 37          | 1,690                    | 4.0                     | 50     |