

Sanicubic 2 Classic

grey water, waste water

Sanicubic 2 Classic is a two pumps station designed for the lifting of waste water from individual houses, small businesses or light commercial premises such as restaurants or pubs.

It uses the Pro X K2 macerator technology which removes waste water through a 50 mm diameter discharge pipe. The two pumps work alternately. The 5 inlets, 2 of which are side inlets, allow great flexibility in the installation of sanitary ware.



PERFORMANCES

- Max. head : 13 m
- Max. flow rate : 15 m³/h

PRODUCT BENEFITS

- Easily accessible with removable motors and level sensors for ease of maintenance
- Alternating operation of the 2 pumps
- 5 inlets, 2 of which are side inlets
- Less chance of clogging due to the Pro X K2 grinder technology
- Discharge in 50 mm ext. pipe



BV Cert. 6045364



DELIVERED AS STANDARD

Classic control box



Wired alarm box



OPTIONAL

Slice gate valve DN50



3308815061030
DN50

Slice gate valve DN100




3308815061023
VANNEDN100

Sanicubic carbon filter




3308815077529
FILTRECUBICSFA


DIMENSIONS

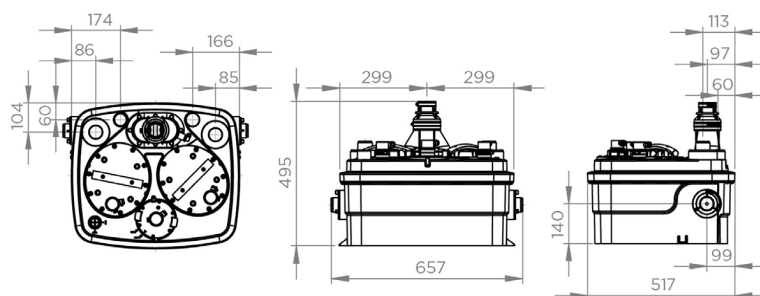

CURVE

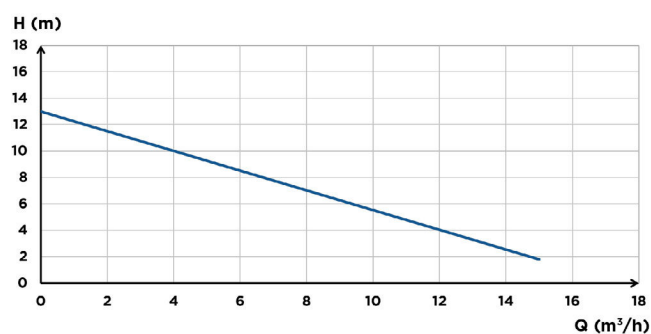

CONNECTIONS



- ➡ External inlet diameter : 40, 50, 100, 110 mm
- ➡ Discharge diameter ext. : 50 mm
- ↔ Ext. ventilation diameter : 50 mm

	Sanicubic 2 Classic
Type of activation	pneumatic
Type of control box	Classic
Material	
Tank	PP
Pump housing	PA 12 GF
Motor housing	PA 12 GF
Impeller	PP GF
Electrical features	
Voltage (V)	230
Frequency (Hz)	50-60
Power consumption P1 (W)	1500
Power output P2 (W)	1050
Mode of operation	S3 50 %
IP rating	IP68
Hydraulics	
Max. head (m)	13
Max. flow rate (m³/h)	15
External inlet diameter (mm)	40, 50, 100, 110
Discharge diameter ext. (mm)	50
Ext. ventilation diameter (mm)	50
Total volume (L)	45
Useable volume (L)	17.5
ON level /OFF level (mm)	140/70
Alarm level (mm)	210
Max. temperature of the pumped liquid (5 min)	70 °C
Type of impeller	Pro X K2 grinder
Identification and logistics	
Gross weight (kg)	35
EAN code	3308815074443
Product code	R4LCIP68NM